

BALTECO

XONYX™
SOLID SURFACE
TABLETOPS



Tabletop programm	3
What is Xonyx solid surface?	4
Construction overview	6
Black Elegance Collection	7
Tabletop comparison	8
Standard tabletop sets	10
Custom tabletops	16
Washing stations	18
Accessories	22
Technical drawings	28
Installation guidelines	35
Xonyx technical datasheet	36
Ordering form	38



INTRODUCTION

Balteco tabletop program provides a comprehensive and versatile range of tabletop solutions. From essential pre-selected standard size sets to fully personalized tailored tabletops and washing stations with basins of various designs and accessories. Expert craftsmanship ensures a flawless, seamless finish through superior bonding and meticulous machining of all Xonyx components.

BALTECO TABLETOPS ARE HIGH-VALUE SOLUTION FOR:

- ★ Furniture countertops
- ★ Wall-mounted tabletops for residential and hotel bathrooms
- ★ Commercial multi-user washing stations for public spaces

KEY ADVANTAGES OF XONYX SOLID SURFACE:

- ★ Highly scratch-resistant and durable surface
- ★ Elegant satin finish: modern aesthetics with easy maintenance
- ★ Seamless integration of tabletop, basins, and skirts
- ★ Functional accessories and features available (towel holder, splashboard, garbage disposal opening, etc)



RAL

new Now available with colored skirt!

WHAT IS XONYX SOLID SURFACE?

Xonyx solid surface is an unique polymer composite material composing of modified polyester resins with acrylic compounds, ATH (aluminium trihydrate) mineral filler and additives developed by Balteco R&D laboratory.

With original SPS (Slow Polymerization System) method applied, Xonyx is providing the best performance characteristics – superior structural strenght and durable scratch resistant antibacterial surface with easy-to-clean properties make it a highly valuable material for different applications.

Xonyx solid surface products (bathtubs, basins, tabletops, shower trays) have acclaimed worldwide recognition and success - value adding and innovative, Xonyx solid surface is great alternative to natural stone, gel-casted marble or ceramic.




-  ANTIBACTERIAL (non-porous)
-  HOMOGENEOUS (no surface layer)
-  EXTREMELY DURABLE
-  HEAT RESISTANT
-  SCRATCH RESISTANT
-  FIREPROOF
-  CALM WHITE
-  PLEASANT TO TOUCH
-  EASY TO CLEAN
-  RENEWABLE
-  COUNTLESS SHAPE OPTIONS



CONSTRUCTION OVERVIEW

The complete product is a combination of diverse options. Starting with a basic tabletop featuring an integrated basin, the final product can be upgraded and enhanced with multiple features for a fully customized solution.

- 1 TABLETOP
- 2 INTEGRATED BASIN
- 3 SIDE AND/OR FRONT SKIRTS
- 4 DRAIN
- 5 SUPPORT ARMS OR MOUNTING BOLTS
- 6 SIPHON
- 7 MIXER HOLE
- 8 SPLASHBOARD
- 9 OVERFLOW SLOT
- 10 GARBAGE HOLE
- 11 TOWEL HOLDER CUTOUT
- 12 TISSUE PAPER DISPENSER

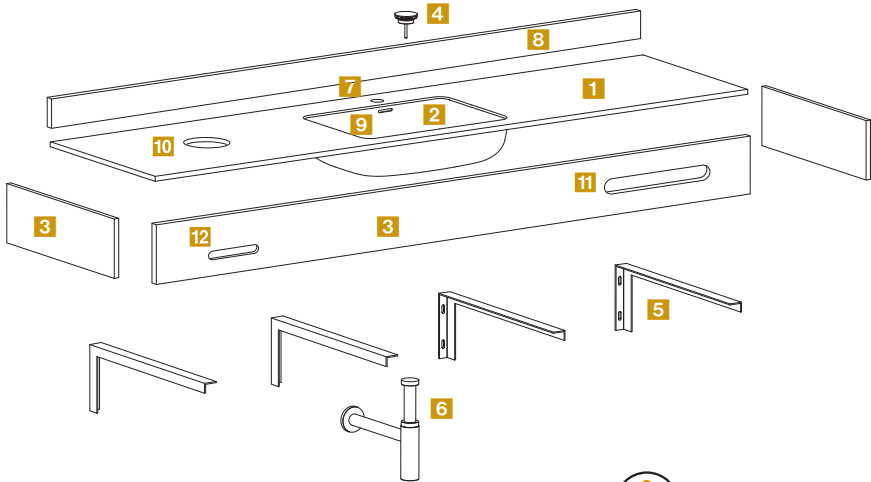

Complete selection of accessories: page 22

BLACK ELEGANCE COLLECTION







A new black-finished accessory-line features a matching drain and siphon system, a tissue paper dispenser, and a sturdy shelf frame.

Discover the collection signature!

TABLETOP COMPARISON

	STANDARD TABLETOP SET page: 10	CUSTOM TABLETOP page: 16	WASHING STATION page: 18
	★ An essential pre-selected complete tabletop set with integrated basin in fixed size ensures the best value.	★ A fully personalized tabletop in a flat mode (no basin) or with single/ multiple basins in various design and accessories.	★ Functional custom-sized multi-user washing station with a long basin for public restrooms (hotels, spas, shopping centres etc).
LENGTH:	600/800/1000/1200/1400/ 1600/1800/2000 mm	600...3000 mm	1400...3000 mm
DEPTH:	400/500 mm	345...610 mm	500...600 mm
HEIGHT:	14 mm (without skirt) or 120 mm (with skirt)	14 mm (without skirt) or 30...200 mm (with skirt)	150...200 mm (with skirt)
DRAIN:	Included (closable)	Optional (multiple choices)	Included (non-closable, single central drain)
OVERFLOW:	Included	Optional	–
WALL INSTALLATION:	Included	Optional (multiple choices)	Included
SPLASHBOARD:	–	Optional	Optional
MIXER HOLE:	Optional	Optional	Optional
COLOR SKIRT: (RAL Classic)	–	Optional	Optional

	STANDARD TABLETOP SET page: 10	CUSTOM TABLETOP page: 16	WASHING STATION page: 18
BASIN TYPE:	Rectangular small 48*26,5 cm Rectangular large 48/50*32 cm Oval 52*32 cm 	Rectangular small 48*26,5 cm Rectangular large 50*32 cm Rectangular extra large 55*40 cm Rectangular wide 64*32 cm Rect. double wide 105*32 cm Oval 50*32 cm Round Ø 40 cm No basin  –	E medium 135*40 cm E large 200*40 cm E dual-medium 2x 135*40 cm U medium 135*42 cm U large 200*42 cm U dual-medium 2x 135*42 cm 
	 HOW TO ORDER 1. Select the product set article (i.e. LC600) 2. Select (if needed) mixer hole (MH) 3. Submit the order	1. Fill the ordering form (page 38): - define tabletop measures - select basin (i.e. SR) - select skirting/height (if needed) - select accessories (if needed) 2. Make a sketch, specify locations 3. Submit the order	1. Fill the ordering form (page 38): - define tabletop measures - select basin (i.e. EMC) - select skirting/height (if needed) - select accessories (if needed) 2. Make a sketch, specify locations 3. Submit the order

STANDARD TABLETOP SETS



LARGE RECTANGULAR

Basin inner size: 48/50*32 cm
Tabletop depth: 500 mm



SMALL RECTANGULAR

Basin inner size: 48*26,5 cm
Tabletop depth: 400 mm




OVAL

Basin inner size: 52*32 cm
Tabletop depth: 500 mm

SET INCLUDES:

- 1 Tabletop in fixed depth of 400 mm or 500 mm
- 2 Basin (small rectangular 48*26,5 cm, large rectangular 48/50*32 cm, or oval 52*32 cm)
- 3 Skirts (if selected) in fixed height of 120 mm
- 4 Closable drain with overflow and white Xonyx-coated cap
- 5 Wall installation (required number of sets included):
 - a) Support arms (applies for all skirt options, except FLRBS)
 - b) Bolts and pre-drilled installation holes on back skirt (applies only for skirt FLRBS)

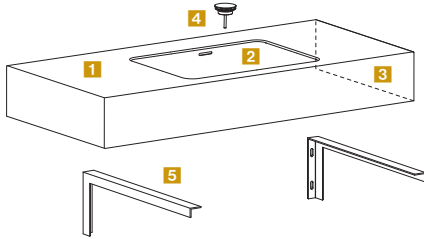

SKIRT OPTIONS:



No skirt



Front skirt
FS



Front+left skirt
FLS



Front+right skirt
FRS



Front+left+right skirt
FLRS



Front+left+right+back skirt
FLRBS





HOW TO ORDER

- 1. Select the product set article (i.e. LC600)
- 2. Select (if needed) mixer hole (MH)
- 3. Submit the order




- ★ Mixer installation holes (Ø 35 mm) pre-drilled on demand.
Not available for a tabletop in depth of 400 mm.
- ★ Technical drawings: page 28

SINGLE BASIN CENTRAL




LARGE RECTANGULAR BASIN in the center

L=600	LC600	LC600FS	LC600FLS	LC600FRS	LC600FLRS	LC600FLRBS
L=800	LC800	LC800FS	LC800FLS	LC800FRS	LC800FLRS	LC800FLRBS
L=1000	LC1000	LC1000FS	LC1000FLS	LC1000FRS	LC1000FLRS	LC1000FLRBS
L=1200	LC1200	LC1200FS	LC1200FLS	LC1200FRS	LC1200FLRS	LC1200FLRBS
L=1400	LC1400	LC1400FS	LC1400FLS	LC1400FRS	LC1400FLRS	LC1400FLRBS
L=1600	LC1600	LC1600FS	LC1600FLS	LC1600FRS	LC1600FLRS	LC1600FLRBS



SMALL RECTANGULAR BASIN in the center

L=600	SC600	SC600FS	SC600FLS	SC600FRS	SC600FLRS	SC600FLRBS
L=800	SC800	SC800FS	SC800FLS	SC800FRS	SC800FLRS	SC800FLRBS
L=1000	SC1000	SC1000FS	SC1000FLS	SC1000FRS	SC1000FLRS	SC1000FLRBS
L=1200	SC1200	SC1200FS	SC1200FLS	SC1200FRS	SC1200FLRS	SC1200FLRBS
L=1400	SC1400	SC1400FS	SC1400FLS	SC1400FRS	SC1400FLRS	SC1400FLRBS
L=1600	SC1600	SC1600FS	SC1600FLS	SC1600FRS	SC1600FLRS	SC1600FLRBS




OVAL BASIN in the center

L=600	OC600	OC600FS	OC600FLS	OC600FRS	OC600FLRS	OC600FLRBS
L=800	OC800	OC800FS	OC800FLS	OC800FRS	OC800FLRS	OC800FLRBS
L=1000	OC1000	OC1000FS	OC1000FLS	OC1000FRS	OC1000FLRS	OC1000FLRBS
L=1200	OC1200	OC1200FS	OC1200FLS	OC1200FRS	OC1200FLRS	OC1200FLRBS


MIXER HOLE: MH

SINGLE BASIN LEFT




LARGE RECTANGULAR BASIN on the left

L=1000	a=300	LL1000	LL1000FS	LL1000FLS	LL1000FRS	LL1000FLRS	LL1000FLRBS
L=1200	a=300	LL1200	LL1200FS	LL1200FLS	LL1200FRS	LL1200FLRS	LL1200FLRBS
L=1400	a=350	LL1400	LL1400FS	LL1400FLS	LL1400FRS	LL1400FLRS	LL1400FLRBS
L=1600	a=400	LL1600	LL1600FS	LL1600FLS	LL1600FRS	LL1600FLRS	LL1600FLRBS
L=1800	a=450	LL1800	LL1800FS	LL1800FLS	LL1800FRS	LL1800FLRS	LL1800FLRBS



SMALL RECTANGULAR BASIN on the left

L=1000	a=300	SL1000	SL1000FS	SL1000FLS	SL1000FRS	SL1000FLRS	SL1000FLRBS
L=1200	a=300	SL1200	SL1200FS	SL1200FLS	SL1200FRS	SL1200FLRS	SL1200FLRBS
L=1400	a=350	SL1400	SL1400FS	SL1400FLS	SL1400FRS	SL1400FLRS	SL1400FLRBS
L=1600	a=400	SL1600	SL1600FS	SL1600FLS	SL1600FRS	SL1600FLRS	SL1600FLRBS
L=1800	a=450	SL1800	SL1800FS	SL1800FLS	SL1800FRS	SL1800FLRS	SL1800FLRBS





OVAL BASIN on the left

L=1000	a=300	OL1000	OL1000FS	OL1000FLS	OL1000FRS	OL1000FLRS	OL1000FLRBS
L=1200	a=300	OL1200	OL1200FS	OL1200FLS	OL1200FRS	OL1200FLRS	OL1200FLRBS
L=1400	a=350	OL1400	OL1400FS	OL1400FLS	OL1400FRS	OL1400FLRS	OL1400FLRBS
L=1600	a=400	OL1600	OL1600FS	OL1600FLS	OL1600FRS	OL1600FLRS	OL1600FLRBS
L=1800	a=450	OL1800	OL1800FS	OL1800FLS	OL1800FRS	OL1800FLRS	OL1800FLRBS


MIXER HOLE: MH

SINGLE BASIN RIGHT




LARGE RECTANGULAR BASIN on the right

L=1000	a=300	LR1000	LR1000FS	LR1000FLS	LR1000FRS	LR1000FLRS	LR1000FLRBS
L=1200	a=300	LR1200	LR1200FS	LR1200FLS	LR1200FRS	LR1200FLRS	LR1200FLRBS
L=1400	a=350	LR1400	LR1400FS	LR1400FLS	LR1400FRS	LR1400FLRS	LR1400FLRBS
L=1600	a=400	LR1600	LR1600FS	LR1600FLS	LR1600FRS	LR1600FLRS	LR1600FLRBS
L=1800	a=450	LR1800	LR1800FS	LR1800FLS	LR1800FRS	LR1800FLRS	LR1800FLRBS



SMALL RECTANGULAR BASIN on the right

L=1000	a=300	SR1000	SR1000FS	SR1000FLS	SR1000FRS	SR1000FLRS	SR1000FLRBS
L=1200	a=300	SR1200	SR1200FS	SR1200FLS	SR1200FRS	SR1200FLRS	SR1200FLRBS
L=1400	a=350	SR1400	SR1400FS	SR1400FLS	SR1400FRS	SR1400FLRS	SR1400FLRBS
L=1600	a=400	SR1600	SR1600FS	SR1600FLS	SR1600FRS	SR1600FLRS	SR1600FLRBS
L=1800	a=450	SR1800	SR1800FS	SR1800FLS	SR1800FRS	SR1800FLRS	SR1800FLRBS




OVAL BASIN on the right

L=1000	a=300	OR1000	OR1000FS	OR1000FLS	OR1000FRS	OR1000FLRS	OR1000FLRBS
L=1200	a=300	OR1200	OR1200FS	OR1200FLS	OR1200FRS	OR1200FLRS	OR1200FLRBS
L=1400	a=350	OR1400	OR1400FS	OR1400FLS	OR1400FRS	OR1400FLRS	OR1400FLRBS
L=1600	a=400	OR1600	OR1600FS	OR1600FLS	OR1600FRS	OR1600FLRS	OR1600FLRBS
L=1800	a=450	OR1800	OR1800FS	OR1800FLS	OR1800FRS	OR1800FLRS	OR1800FLRBS


MIXER HOLE: MH

DUAL-BASIN CENTRAL




LARGE RECTANGULAR BASINS in the center

L=1200	b=600	LD1200	LD1200FS	LD1200FLS	LD1200FRS	LD1200FLRS	LD1200FLRBS
L=1400	b=700	LD1400	LD1400FS	LD1400FLS	LD1400FRS	LD1400FLRS	LD1400FLRBS
L=1600	b=800	LD1600	LD1600FS	LD1600FLS	LD1600FRS	LD1600FLRS	LD1600FLRBS
L=1800	b=900	LD1800	LD1800FS	LD1800FLS	LD1800FRS	LD1800FLRS	LD1800FLRBS
L=2000	b=1000	LD2000	LD2000FS	LD2000FLS	LD2000FRS	LD2000FLRS	LD2000FLRBS



SMALL RECTANGULAR BASINS in the center

L=1200	b=600	SD1200	SD1200FS	SD1200FLS	SD1200FRS	SD1200FLRS	SD1200FLRBS
L=1400	b=700	SD1400	SD1400FS	SD1400FLS	SD1400FRS	SD1400FLRS	SD1400FLRBS
L=1600	b=800	SD1600	SD1600FS	SD1600FLS	SD1600FRS	SD1600FLRS	SD1600FLRBS
L=1800	b=900	SD1800	SD1800FS	SD1800FLS	SD1800FRS	SD1800FLRS	SD1800FLRBS
L=2000	b=1000	SD2000	SD2000FS	SD2000FLS	SD2000FRS	SD2000FLRS	SD2000FLRBS




OVAL BASINS in the center

L=1200	b=600	OD1200	OD1200FS	OD1200FLS	OD1200FRS	OD1200FLRS	OD1200FLRBS
L=1400	b=700	OD1400	OD1400FS	OD1400FLS	OD1400FRS	OD1400FLRS	OD1400FLRBS
L=1600	b=800	OD1600	OD1600FS	OD1600FLS	OD1600FRS	OD1600FLRS	OD1600FLRBS
L=1800	b=900	OD1800	OD1800FS	OD1800FLS	OD1800FRS	OD1800FLRS	OD1800FLRBS


MIXER HOLE: MH*2

DUAL-BASIN LEFT



LARGE RECTANGULAR BASINS on the left

L=1600	b=600	LDL1600	LDL1600FS	LDL1600FLS	LDL1600FRS	LDL1600FLRS	LDL1600FLRBS
L=1800	b=700	LDL1800	LDL1800FS	LDL1800FLS	LDL1800FRS	LDL1800FLRS	LDL1800FLRBS
L=2000	b=800	LDL2000	LDL2000FS	LDL2000FLS	LDL2000FRS	LDL2000FLRS	LDL2000FLRBS




SMALL RECTANGULAR BASINS on the left

L=1600	b=600	SDL1600	SDL1600FS	SDL1600FLS	SDL1600FRS	SDL1600FLRS	SDL1600FLRBS
L=1800	b=700	SDL1800	SDL1800FS	SDL1800FLS	SDL1800FRS	SDL1800FLRS	SDL1800FLRBS
L=2000	b=800	SDL2000	SDL2000FS	SDL2000FLS	SDL2000FRS	SDL2000FLRS	SDL2000FLRBS


MIXER HOLE: MH*2

DUAL-BASIN RIGHT



LARGE RECTANGULAR BASINS on the right

L=1600	b=600	LDR1600	LDR1600FS	LDR1600FLS	LDR1600FRS	LDR1600FLRS	LDR1600FLRBS
L=1800	b=700	LDR1800	LDR1800FS	LDR1800FLS	LDR1800FRS	LDR1800FLRS	LDR1800FLRBS
L=2000	b=800	LDR2000	LDR2000FS	LDR2000FLS	LDR2000FRS	LDR2000FLRS	LDR2000FLRBS



SMALL RECTANGULAR BASINS on the right

L=1600	b=600	SDR1600	SDR1600FS	SDR1600FLS	SDR1600FRS	SDR1600FLRS	SDR1600FLRBS
L=1800	b=700	SDR1800	SDR1800FS	SDR1800FLS	SDR1800FRS	SDR1800FLRS	SDR1800FLRBS
L=2000	b=800	SDR2000	SDR2000FS	SDR2000FLS	SDR2000FRS	SDR2000FLRS	SDR2000FLRBS

MIXER HOLE: MH*2

CUSTOM TABLETOPS



HOW TO ORDER

- Fill the ordering form (page 38):
 - define tabletop measures
 - select basin (i.e. **SR**)
 - select skirting/height (if needed)
 - select accessories (if needed)
- Make a sketch, specify locations
- Submit the order

- CUSTOM tabletop serie offers no fixed configuration. All details are subject to selection for a personalized product.
 - Skirt available in any RAL Classic color. The default color is Xonyx white.
 - Technical drawings: page 28
 - Ordering form: page 38
 - Accessories: page 22




E-SERIES WASHING STATION



★ Medium basin for two faucets (EMC)

inner width 135 cm, single drain connection
L= 1400...3000 mm
D= 500...600 mm
H= 150...200 mm

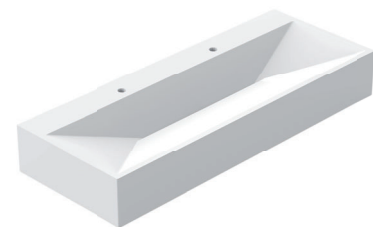


★ Large basin for three faucets (ELC)

inner width 200 cm, single drain connection
L= 2050...3000 mm
D= 500...600 mm
H= 150...200 mm



★ Double medium basin for four faucets (EMD)

inner width a 135 cm, two drain connection
L= 2775...3000 mm
D= 500...600 mm
H= 150...200 mm

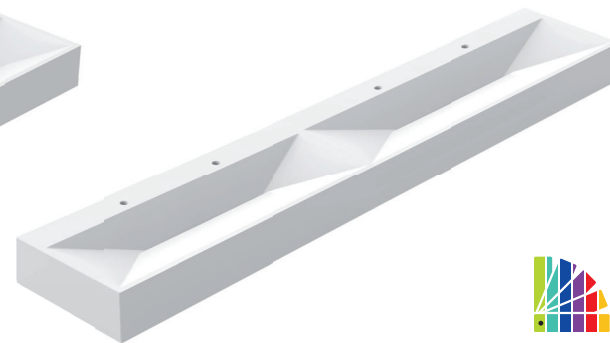

Washing station includes:

- ★ Tabletop in customized size
- ★ Integrated basin
- ★ Single central drain
- ★ Skirt on all 4 sides
- ★ Wall-mounting bolts and pre-drilled installation holes on back skirt



- ★ Mixer installation holes are pre-drilled on demand
- ★ Skirt available in any RAL Classic color. The default color is Xonyx white.
- ★ Technical drawings: page 28
- ★ Ordering form: page 38
- ★ Accessories: page 22



HOW TO ORDER

1. Fill the ordering form (page...):
 - define tabletop measures
 - select basin (i.e. EMC)
 - select skirting/height (if needed)
 - select accessories (if needed)
2. Make a sketch, specify locations
3. Submit the order



U-SERIES WASHING STATION



★ Medium basin for two faucets (UMC)

Inner width 135 cm, single drain connection
L= 1450...3000 mm
D= 500...600 mm
H= 150...200 mm



★ Large basin for three faucets (ULC)

Inner width 200 cm, single drain connection
L= 2100...3000 mm
D= 500...600 mm
H= 150...200 mm



★ Double medium basin for four faucets (UMD)

Inner width a 135 cm, two drain connection
L= 2850...3000 mm
D= 500...600 mm
H= 150...200 mm



Washing station includes:

- ★ Tabletop in customized size
- ★ Integrated basin
- ★ Single central drain
- ★ Skirt on all 4 sides
- ★ Wall-mounting bolts and pre-drilled installation holes on back skirt



- ★ Mixer installation holes are pre-drilled on demand
- ★ Skirt available in any RAL Classic color. The default color is Xonyx white.
- ★ Technical drawings: page 28
- ★ Ordering form: page 38
- ★ Accessories: page 22



1. Fill the ordering form (page...):
 - define tabletop measures
 - select basin (i.e. UMC)
 - select skirting/height (if needed)
 - select accessories (if needed)
2. Make a sketch, specify locations
3. Submit the order




ACCESSORIES




SKIRTING

Skirting adds aesthetic look and keeps technical area hidden. Skirt is an integrated extra – pre-mounted to the tabletop at the factory.


Front skirt (FS)




Front and left skirt (FLS)




Front and right skirt (FRS)



Front, left and right skirt (FLRS)



Front, left, right and back skirt (FLRBS)




Skirt available in any RAL Classic color.
The default color is Xonyx white.


SPLASHBOARD

Splashboard protects the wall and helps to keep cleanliness. Splashboard is not integrated to the tabletop, but supplied as separate Xonyx board(s) to be installed on-site.


Back splashboard (BB)




Back and left splashboard (BLB)



Back and right splashboard (BRB)



Back, left and right splashboard (BLRB)



DRAINS

BASIN DRAIN (D1)



- Fixed open (non closable), no overflow
- Brass chrome finish
- Drain thread G 1 1/4

BASIN DRAIN (D2)



- Fixed open (non closable), no overflow
- Xonyx-coated white cap
- Drain thread G 1 1/4

Xonyx-coated cap is matching the tabletop surface color. All-white concept allows matching with tap mixer and accessories of any finish.

BASIN DRAIN (D6)



- Closable (click/click), with overflow
- Xonyx-coated white cap
- Drain thread G 1 1/4

This option requires minimum 55 mm distance between the basin and the mixer hole center.

BASIN DRAIN (D4)



- Closable (click/click), no overflow
- Xonyx-coated white cap
- Drain thread G 1 1/4


Closable drain for situation where overflow is not required by legislative regulations.

BASIN DRAIN BLACK (D7)



- Closable (click/click), with overflow
- Black matte finish, metal
- Drain thread G 1 1/4

This option requires minimum 55 mm distance between the basin and the mixer hole center.

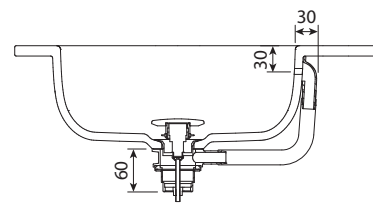

Cross-section view of D6/D7

DECORATIVE SIPHON (S01)



- Brass chrome finish
- Drain thread G 1 1/4, connection Ø 32 mm

Decorative siphon is with chrome finishing and is recommended when drainage area is visible.

SIPHON (S02)



- Low type
- PVC, grey
- Drain thread G 1 1/4, connection Ø 32/40 mm



Low siphon is in grey PVC (plastic) finish. Recommended when open space under basin is needed and/or cupboard is placed under the basin.

DECORATIVE SIPHON BLACK (S03)



- Black matte
- Drain thread G 1 1/4, connection Ø 32 mm

Decorative siphon is with black finishing and is recommended when drainage area is visible.

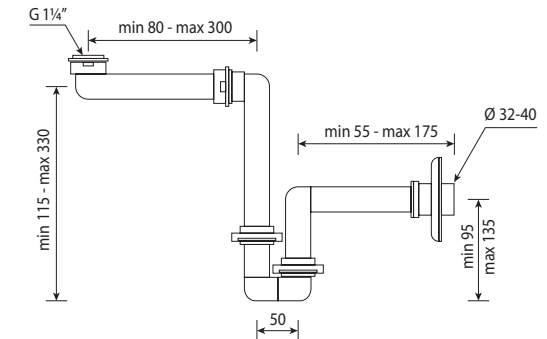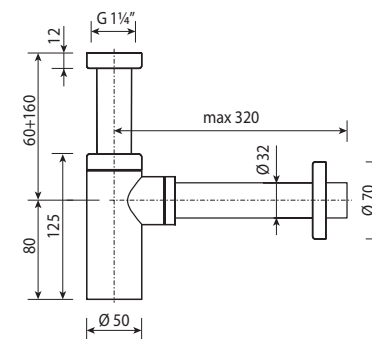

SUPPORT ARMS AND FRAMES

WALL MOUNTING PROFILE




- White semi matte, powder-painted steel
- 400*30*30 mm (L1)

SUPPORT ARM SET



- White semi matte, powder-painted steel
- 480*200*30 mm (SA4)
- Set of 2 pcs (left and right)
- This arm is model-specific and one set is required to support basin DR underneath on wall-mounted installation

FRAME SYSTEM BLACK




- Black semi matte (RAL 9005), powder-painted steel
- 1360*430*175 mm (VO-2021)
- This cut-to-size frame system is for wall-mounted flat tabletop with a length of 140 cm (max) and a depth of 45 cm
- The connection bars need to be cut shorter to accommodate any tabletop length less than 140 cm

SUPPORT ARM SET (different types)



- White semi matte, powder-painted steel
- Set of 2 pcs (left and right)

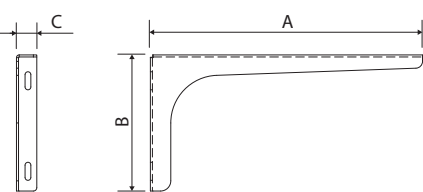

- SA1: 400*150*30 mm (for tabletop in depth up to 500 mm and skirt height up to 150 mm)
- SA2: 400*200*30 mm (for tabletop in depth up to 500 mm and skirt height from 151 mm)
- SA3: 480*200*30 mm (for tabletop in depth from 501 mm)
- SA5: 350*150*30 mm (for tabletop in depth up to 420 mm)

NUMBER OF SUPPORT ARM SETS NEEDED:


- ★ 600...1000 mm – 1 set
- ★ 1001...1800 mm – 2 sets
- ★ 1801...3000 mm – 3 sets

EXTRAS

INTEGRATED TISSUE PAPER DISPENSER (TPD)



- Chrome finish
- Paper tissue box size: 250*122*80 mm
- Skirt min 150 mm is required



INTEGRATED TISSUE PAPER DISPENSER BLACK (TPB)




- Black matte finish
- Paper tissue box size: 250*122*80 mm
- Skirt min 150 mm is required

INTEGRATED TOWEL CUTOUT (TS)



- Skirt min 150 mm is required
- Default cutout size: 60*400 mm
- Cutout size (on a side): tabletop depth -100 mm
- Cutout on side(s) is available only on skirting FLS, FRS, FLRS and FLRBS.



CUT-OUTS

MIXER HOLE




- Default Ø 35 mm (MH)
- Custom size Ø 30...55 mm (MHX)

GARBAGE HOLE



- Default Ø 150 mm (GH)
- Custom size Ø 100...250 mm (GHX)

DRAINAGE HOLE




- Drainage hole for freestanding basin
- Default Ø 120 mm (DH)
- Custom size Ø 80...150 mm (DHX)


TECHNICAL DRAWINGS

STANDARD


Large rectangular

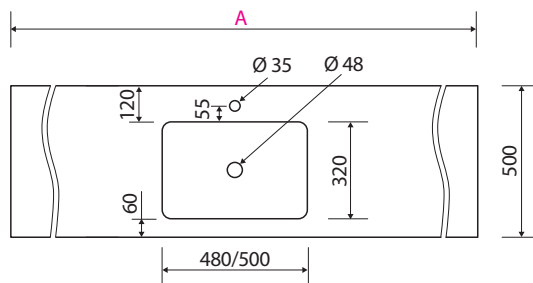




Without skirt






With skirt



Small rectangular

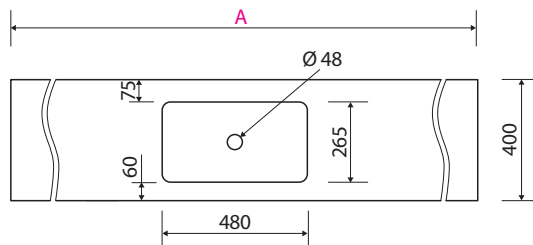

Oval

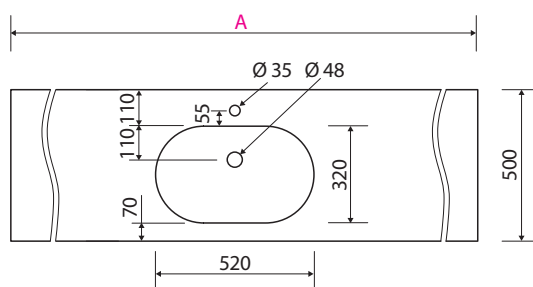


Mixer installation hole pre-drilled on demand and only for the tabletop in depth of 500 mm.


Xonyx sheet (thickness) tolerance ± 1 mm. Basin positioning tolerance on tabletop ± 5 mm. Tabletop dimentional tolerance $\pm 0,3\%$.

CUSTOM


Basin type LR

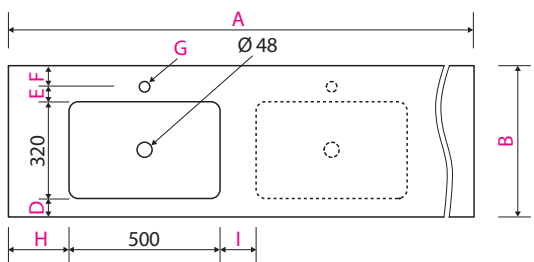

Without skirt or
splashboard

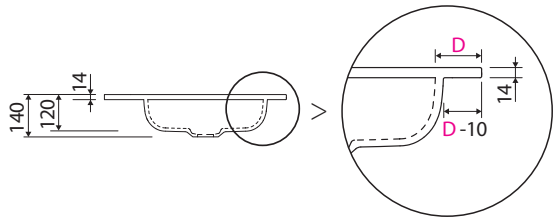

With skirt and/or
splashboard

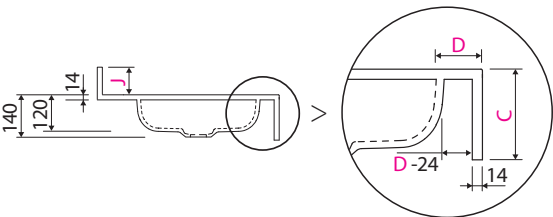

	A	B*	C	D	E*	F*	G*	H	I	J
Min	620	400	30	40	38 (55) [†]	37	Ø30	60	90	30
Max	3000	610	200	**	**	**	Ø40	**	**	150

E* - Recommended (optimized) 55 mm. Check mixer specs datasheet first!




[†] - Applicable only to drain D6

F* - Recommended (optimized) 65 mm. Check mixer specs datasheet first!

Xonyx sheet (thickness) tolerance ± 1 mm. Basin positioning tolerance on tabletop ± 5 mm. Tabletop dimentional tolerance $\pm 0,3\%$.

CUSTOM

Basin type SR

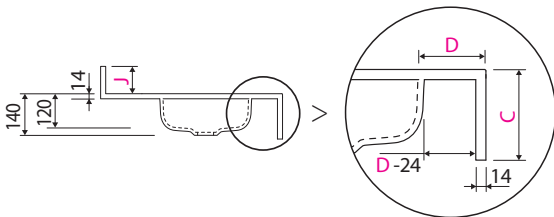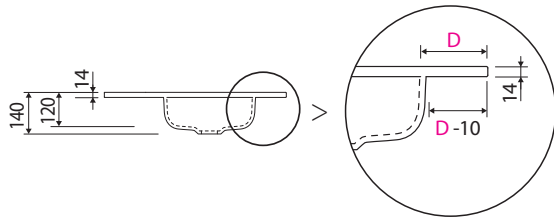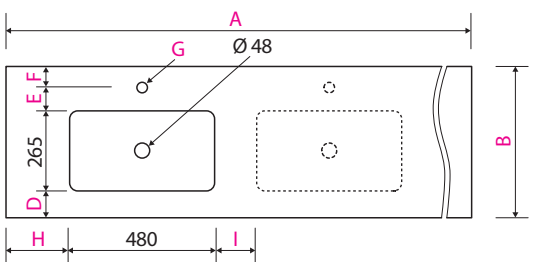

	A	B*	C	D	E*	F*	G*	H	I	J
Min	600	345	30	40	38 (55) [†]	37	Ø30	60	90	30
Max	3000	610	200	**	**	**	Ø40	**	**	150


G* - Recommended (optimized) Ø35 mm. Check mixer specs datasheet first!

** - Max. value depends on the size of the tabletop and number of basins


B* - Min. depth shown excludes mixer hole

CUSTOM


Basin type WR

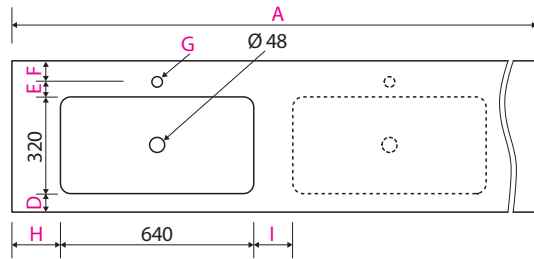

Without skirt or
splashboard

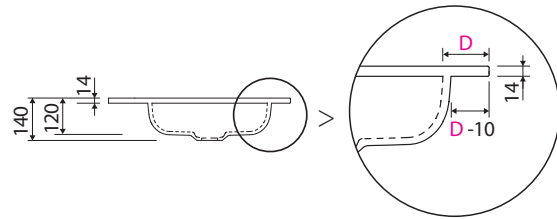

With skirt and/or
splashboard



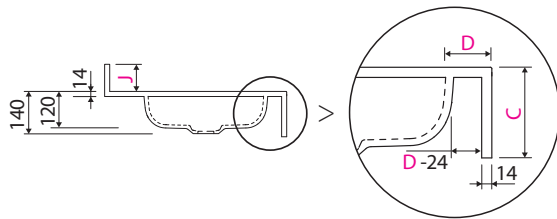


	A	B*	C	D	E*	F*	G*	H	I	J
Min	760	400	30	40	38 (55) [†]	37	Ø30	60	90	30
Max	3000	610	200	**	**	**	Ø40	**	**	150

E* - Recommended (optimized) 55 mm. Check mixer specs datasheet first!
[†] - Applicable only to drain D6
 F* - Recommended (optimized) 65 mm. Check mixer specs datasheet first!

CUSTOM

Basin type XR

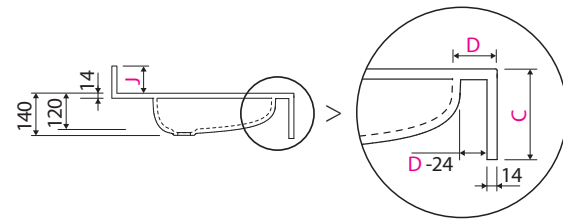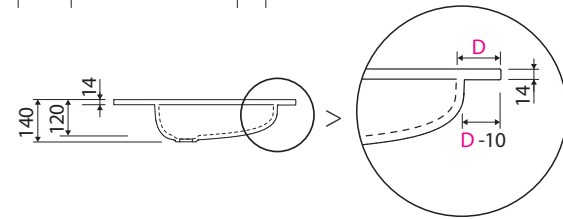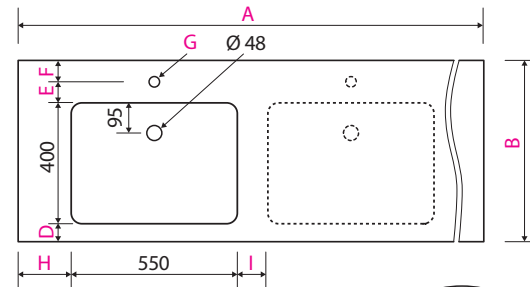


	A	B*	C	D	E*	F*	G*	H	I	J
Min	670	480	30	40	38 (55) [†]	37	Ø30	60	90	30
Max	3000	610	200	**	**	**	Ø40	**	**	150

G* - Recommended (optimized) Ø35 mm. Check mixer specs datasheet first!
 ** - Max. value depends on the size of the tabletop and number of basins
 B* - Min. depth shown excludes mixer hole


Xonyx sheet (thickness) tolerance ± 1 mm. Basin positioning tolerance on tabletop ± 5 mm. Tabletop dimentional tolerance $\pm 0,3\%$.

CUSTOM


Basin type OV

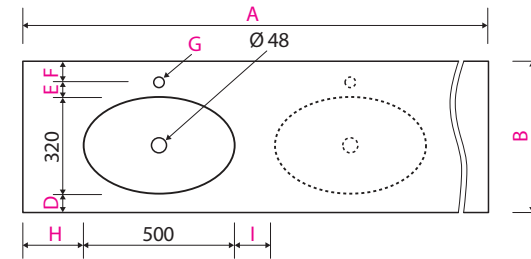

Without skirt or
splashboard

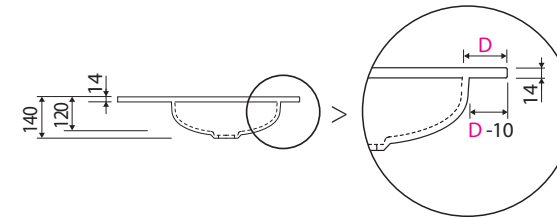

With skirt and/or
splashboard

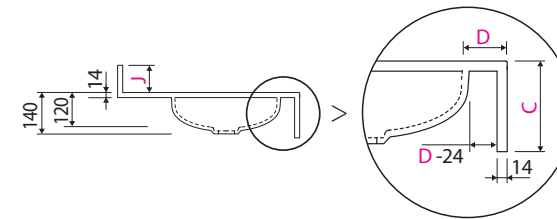




	A	B*	C	D	E*	F*	G*	H	I	J
Min	620	400	30	40	38	37	Ø30	60	90	30
Max	3000	610	200	**	**	**	Ø40	**	**	150

E* - Recommended (optimized) 55 mm. Check mixer specs datasheet first!
 F* - Recommended (optimized) 65 mm. Check mixer specs datasheet first!
 K*, M* - Optimized distance. Check mixer specs datasheet first!
 B* - Min. depth shown excludes mixer hole

Xonyx sheet (thickness) tolerance ± 1 mm. Basin positioning tolerance on tabletop ± 5 mm. Tabletop dimentional tolerance $\pm 0,3\%$.

CUSTOM

Basin type NC

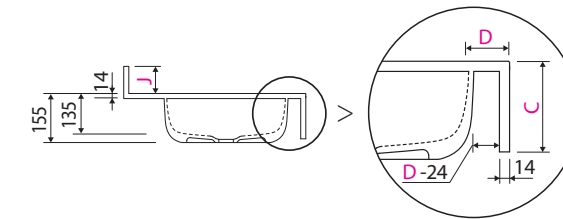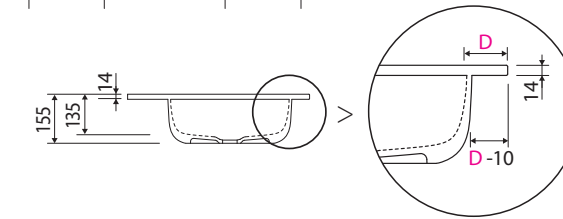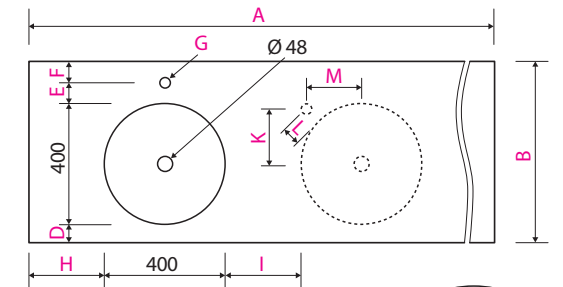


	A	B*	C	D	E*	F*	G*	H	I	J	K*	L*	M*
Min	600	480	30	40	38	37	Ø30	60	90	30	180	38	170
Max	3000	610	200	**	**	**	Ø40	**	**	150	**	**	**


G*, L* - Recommended (optimized) Ø35 mm. Check mixer specs datasheet first!
 Mixer position on a side is required if distance from the basin to backwall is less than 75 mm.
 ** - Max. value depends on the size of the tabletop and number of basins

CUSTOM


Basin type DR

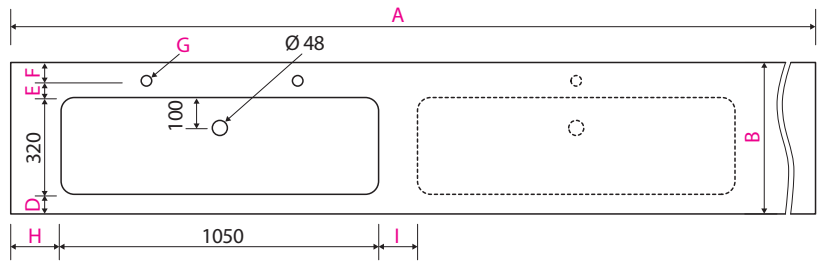

Without skirt or
splashboard

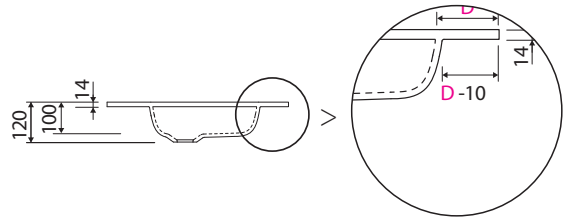

With skirt and/or
splashboard

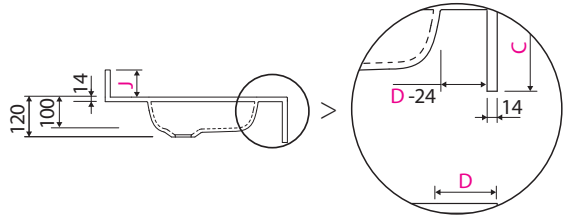

	A	B*	C	D	E*	F*	G*	H	I	J
Min	1170	400	30	40	38 (55) ¹	37	Ø30	60	90	30
Max	3000	610	200	**	**	**	Ø40	**	**	150

E* - Recommended (optimized) 55 mm. Check mixer specs datasheet first!

¹ - Applicable only to drain D6



F* - Recommended (optimized) 65 mm. Check mixer specs datasheet first!

B* - Min. depth shown excludes mixer hole

Xonyx sheet (thickness) tolerance ± 1 mm. Basin positioning tolerance on tabletop ± 5 mm. Tabletop dimentional tolerance $\pm 0,3\%$.

CUSTOM

Flat tabletop (no basin)

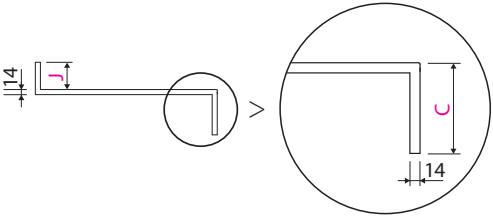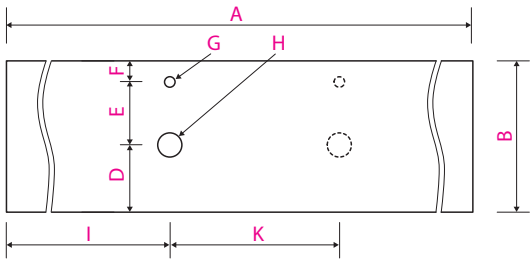

	A	B	C	D*	E*	F*	G*	H*	I*	J	K*
Min	100	100	30	**	**	37	Ø30	80	**	30	**
Max	3000	610	200	**	**	**	Ø40	150	**	150	**

G* - Recommended (optimized) Ø35 mm. Check mixer specs datasheet first!




H* - Recommended (optimized) Ø120 mm. Check basin specs datasheet first!

** - Value depends on the size of the tabletop and number of basins

Xonyx sheet (thickness) tolerance ± 1 mm. Basin positioning tolerance on tabletop ± 5 mm. Tabletop dimentional tolerance $\pm 0,3\%$.

WASHING STATION

E-Series

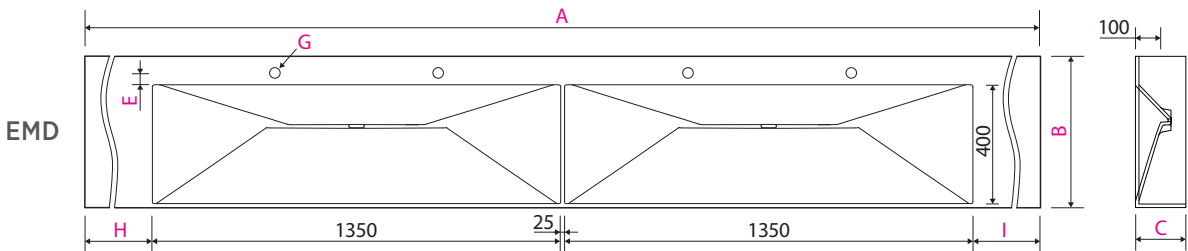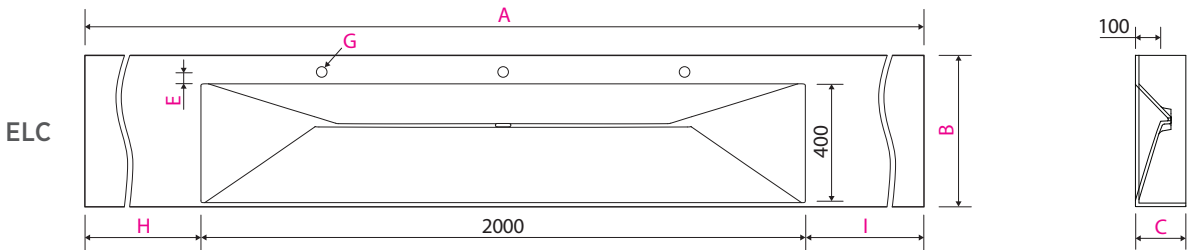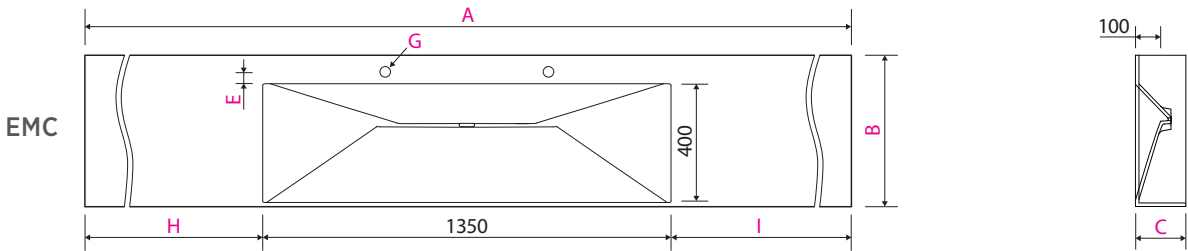


	A	B	C	E	G	H/I
Min	1400	500	150	38	Ø30	25
Max	3000	600	200	**	Ø40	**

** - Value depends on the size of the tabletop

Xonyx sheet (thickness) tolerance ± 1 mm. Basin positioning tolerance on tabletop ± 5 mm. Tabletop dimentional tolerance $\pm 0,3\%$.

U-Series

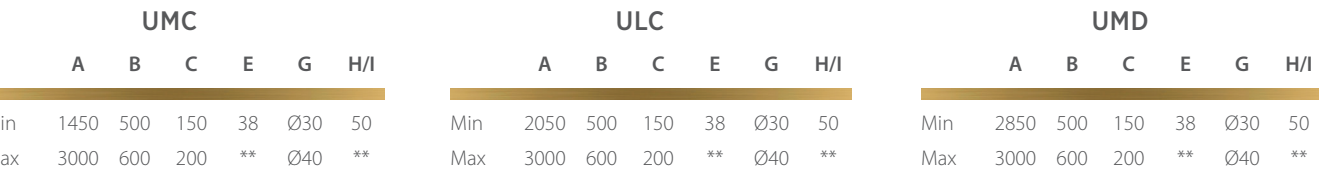

Xonyx sheet (thickness) tolerance ± 1 mm. Basin positioning tolerance on tabletop ± 5 mm. Tabletop dimensional tolerance $\pm 0,3\%$.

SUPPORT ARM PLACEMENT

Single basin

Diagram illustrating the required clearances for a fire alarm pull station:

- Minimum clearance from the left wall: min 60
- Maximum clearance from the left wall: max 250
- Maximum clearance from the first vertical obstruction: max 600
- Maximum clearance from the second vertical obstruction: max 600

Technical drawing showing three wall-mounted units with dimensions for mounting holes and unit spacing.

Dimensions for mounting holes (mm):

- Unit 1: min 60, max 250
- Unit 2: min 90, max 300
- Unit 3: min 301, max 600



XONYX TECHNICAL DATASHEET

PERFORMANCE PROPERTIES OF XONYX PRODUCTS
(solid surface shaped products)

PROPERTY	RESULT	UNIT	STANDARD/TEST
Density	1,76	g/cm ³	ISO 1183
Weight per m ² (14 mm sheet)	24,6	kg/m ²	–
Hardness (Barcol method)	60,4	(Barcol value)	ASTM D 2583 - 13a
Hardness (Shore D method)	93,0	(Shore D value)	ISO 868:2004
Hardness (Rockwell M method)	94,7	(Rockwell M value)	ISO 2039-2:2000
Tensile strength	40,1	MPa (N/mm ²)	ISO 527-2
Flexural strength	63,8	MPa (N/mm ²)	ISO 178
Water resistance (absorb. after 48h)	Passed	–	ISO 62:2008
Thermal shock resistance	Passed	–	ISO 19712-3
Dry heat resistance	Passed	–	ISO 19712-3
Wet heat resistance	Passed	–	ISO 19712-3
Impact resistance, ball drop test	Passed	–	ISO 19712-3
Stain and chemical resistance	Passed	–	ISO 19712-3
Cigarette burn	Passed	–	ISO 19712-3
Colour stability / lightfastness	Passed	–	ISO 19712-3
Surface test	Passed	–	ISO 19712-3
Renewability	Passed	–	ISO 19712-3
Bacterial and fungal resistance	Does not support microbiological growth	–	ISO 19712-1 (ISO 846)




ORDERING FORM

	CUSTOM TABLETOP 	WASHING STATION 	Page:
Confirm the tabletop's exact measurements	A=.....mm B=.....mm C*=.....mm	A=.....mm B=.....mm C=.....mm	22
	Skirt*: ☐ FS ☐ FLRS ☐ FLS ☐ FLRBS ☐ FRS	—	
Select basin type and specify the quantity	Basin**: ☐ SR.....pc(s) ☐ LR.....pc(s) ☐ XR.....pc(s) ☐ WR.....pc(s) ☐ DR.....pc(s) ☐ OV.....pc(s) ☐ NC.....pc(s) ☐ NO BASIN	☐ EMC ☐ ELC ☐ EMD ☐ UMC ☐ ULC ☐ UMD	16-20
Select accessories and specify the quantities	Drain: ☐ D1.....pc(s) ☐ D6.....pc(s) Siphon: ☐ S01.....pc(s) Support arm: ☐ SA1.....set(s) ☐ SA4.....set(s) ☐ L1.....pc(s)	☐ D2.....pc(s) ☐ D7.....pc(s) ☐ S02.....pc(s) ☐ SA2.....set(s) ☐ SA5.....set(s) ☐ VO-2021	24
	☐ D4.....pc(s)	—	25
	☐ S03.....pc(s)	—	26
	Extras**: ☐ TPD.....pc(s) ☐ TPB.....pc(s) ☐ TS.....pc(s)	—	27
	Cut-outs**: ☐ MH.....pc(s) ☐ GH.....pc(s) ☐ DH.....pc(s) ☐ MHX, Ø.....mm ☐ GHX, Ø.....mm ☐ DHX, Ø.....mm	pc(s)pc(s)pc(s)	27
	Splashboard: ☐ BB ☐ BLB ☐ BRB ☐ BLRB h=.....mm	—	22
Skirt color: ☐(RAL Classic color code)	—	22	

* The height (C) is only applicable for tabletop including skirt. ** Position to be indicated on the drawing.

Ordering a CUSTOM or WASHING STATION tabletop made simple:

- ★ Start by sketching your desired tabletop design and then complete the ordering form.
- ★ Ensure the technical limitations per specific basin type (see pages: 29-33).
- ★ Positions and distances of the basin, extras and mixer hole to be indicated on the drawing (in mm).

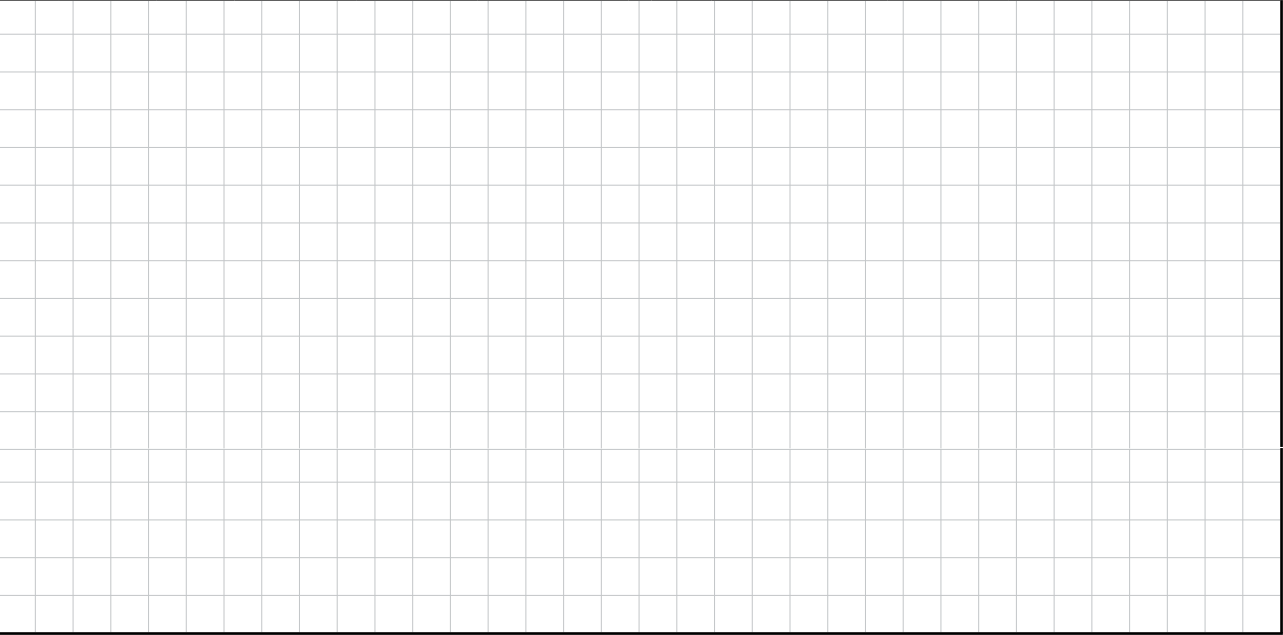Drawing	
	
for approval	
Date	
Name	
Signature	





BALTECO